



Dimensions (Unit:mm)

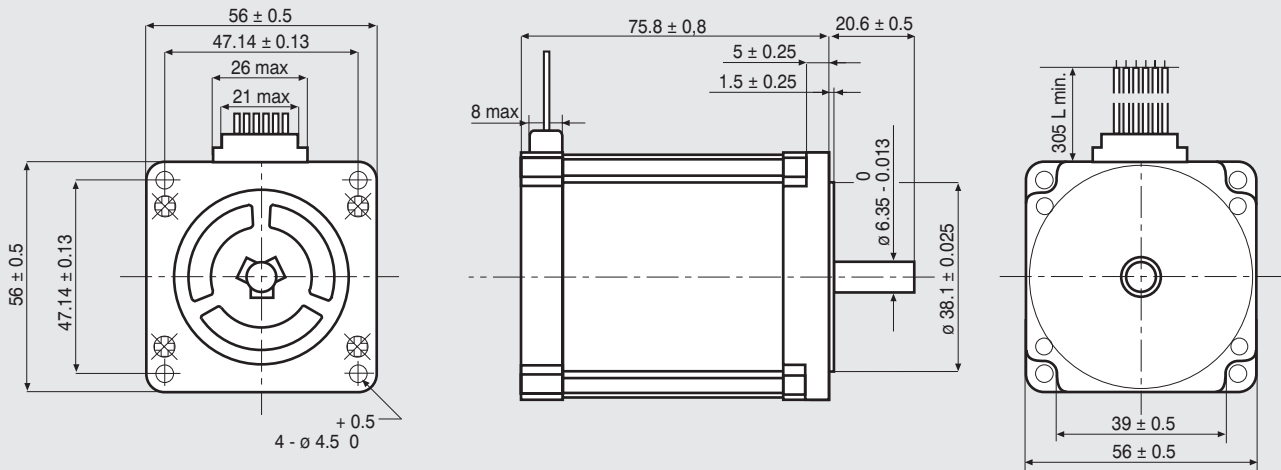


FEATURES

MODEL	103-H7126-0140
BASIC STEP ANGLE	$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT (Amp)	0.75 ^(*)
UNIPOLAR CURRENT (Amp)	1.0
RESISTANCE (Ohm)	8.6
INDUCTANCE (mH)	19
BIPOLAR HOLDING TORQUE (Ncm)	165
UNIPOLAR HOLDING TORQUE (Ncm)	130
ROTOR INERTIA ($\text{Kg} \cdot \text{m}^2 \times 10^{-7}$)	360
THEORETICAL ACCELERATION ($\text{rad} \times \text{sec}^{-2}$)	45800
BACK E.M.F. (V/Krpm)	92
MASS (Kg)	1
LEADS CODE	IV

TORQUE/SPEED CURVE

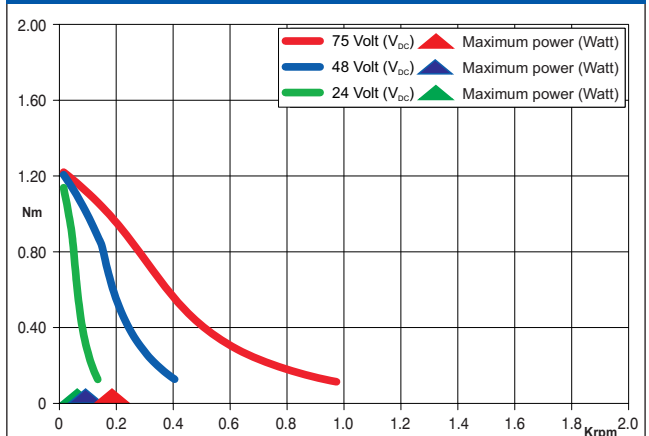

^(*)Bipolar series connection.
^(*)Collegamento bipolare serie.

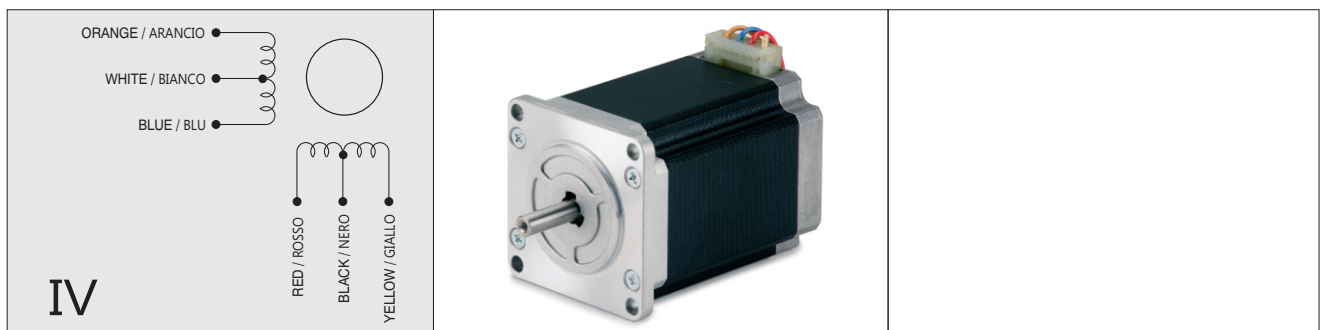

Suggested R.T.A. driver: BSD Series, CSD/A-CSD Series, NDC/A-NDC Series, HGD Series.