


SP2863-51SX01

SANYO DENKI
SANMOTION




Dimensions (Unit:mm)

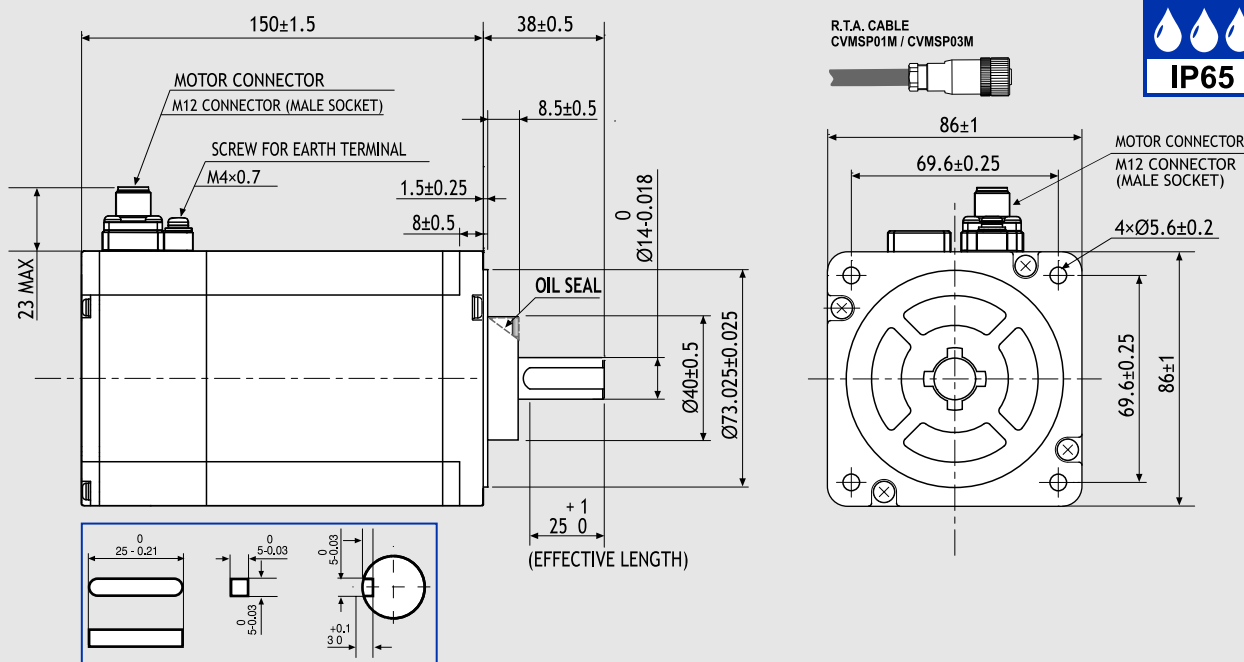

FEATURES

MODEL	SP2863-51SX01
BASIC STEP ANGLE	1.8° ± 0.09°
BIPOLAR CURRENT (Amp)	4.0
RESISTANCE (Ohm)	1.0
INDUCTANCE (mH)	7.9
BIPOLAR HOLDING TORQUE (Ncm)	900
ROTOR INERTIA (Kgm ² x 10 ⁻⁷)	4500
THEORETICAL ACCELERATION (rad x sec. ⁻²)	20000
BACK E.M.F. (V/Krpm)	225
MASS (Kg)	4.2
INTERNATIONAL STANDARDS	UL, CSA, CE, RoHS
INSULATION VOLTAGE (V)	250 V _{AC} (350 V _{DC})
PROTECTION DEGREE - INSULATION CLASS	FULL IP65 - F
LEADS CODE	V

TORQUE/SPEED CURVE

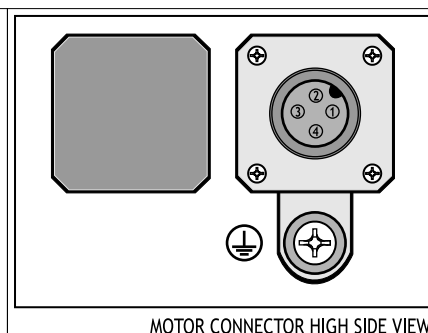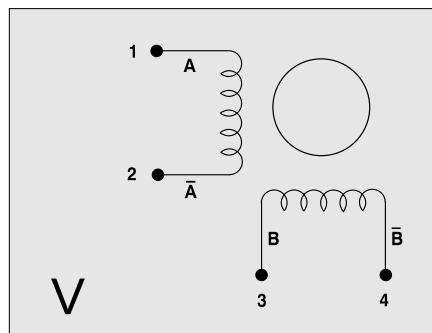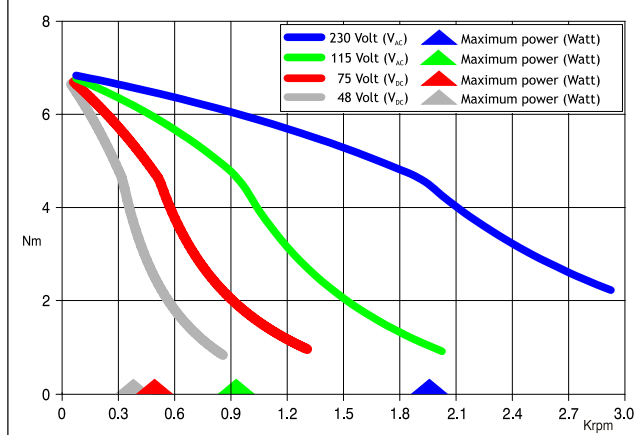

Suggested driver: preferred solution X-PLUS Series, X-MIND Series (110-230 Vac)

